


GRANULATOR AG

GRANULATOR WITH BITER QUALITY

The extremely robust AG Type Granulator was developed for the size reduction of metals but does also perform very well when processing other material such as cable waste, plastics and other materials. No matter which type of material is fed into the AG Granulator – metal, recyclable waste or substitute fuels – each AG granulator performs brilliantly.

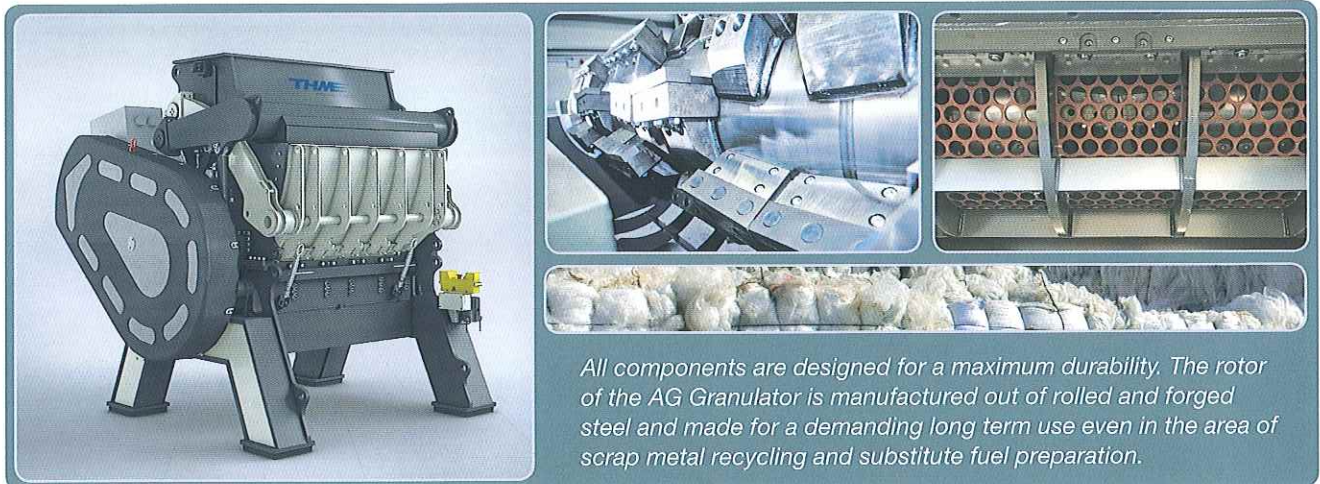

All components are designed for a maximum durability. The rotor of the AG Granulator is manufactured out of rolled and forged steel and made for a demanding long term use even in the area of scrap metal recycling and substitute fuel preparation.

✓ ALL BENEFITS AT A GLANCE

- High throughput capacity up to 20 t/hr.
- Working between 1600 and 2800 mm and drive power from 250 to 500 kW
- Constant cutting quality due to re-adjustable knives
- High performance reserves even when cutting massive metal parts

✓ AREAS OF APPLICATION

The AG Granulator from THM is made for throughput, throughput and again throughput. The areas of applications are exceptional large.

- Domestic and industrial waste
- Oil filters
- Steel and plastic barrels
- Plastics
- Paper
- etc.



✓ PROCESSED MATERIAL FRACTIONS

- Defined output particle size due to easy exchangeable screen

- Granules and flakes 10 – 100 mm

i TECHNICAL SPECIFICATION

Type	Power	Rotor Ø	Infeed Opening	Overall Dimension (L / W / H)	Weight
AG 1608	250 kW	785 mm	approx. 1630 x 615 mm	approx. 2800 x 2990 x 3360 mm	approx. 23,5 t
AG 2008	315 kW	785 mm	approx. 2020 x 615 mm	approx. 3200 x 2990 x 3360 mm	approx. 26 t
AG 2808	2 x 250 kW	785 mm	approx. 2820 x 615 mm	approx. 4000 x 2990 x 3360 mm	approx. 31 t

